


Please Approve this Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201811041	2018.11.30

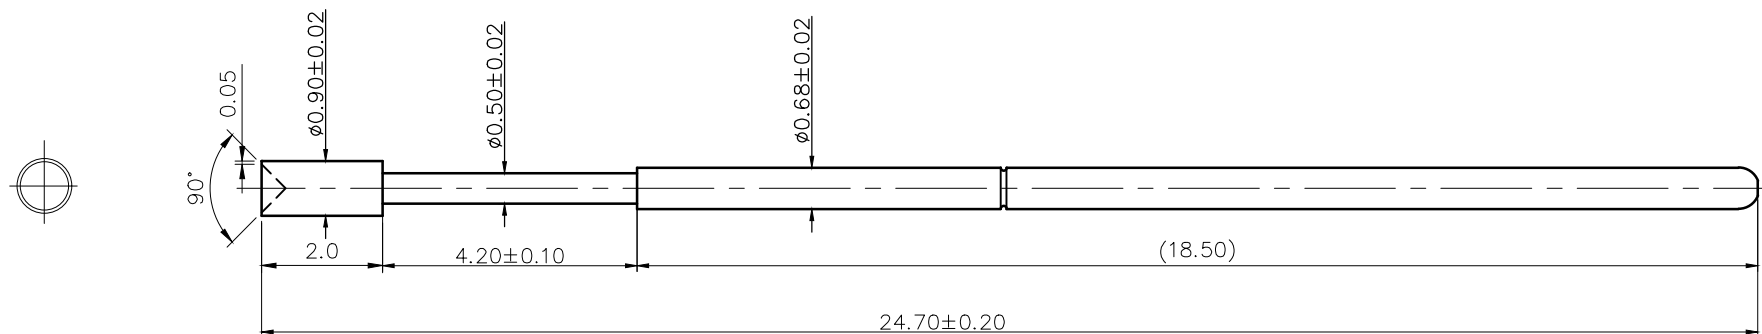

Notes :

- Materials and Finishes
Plunger : BeCu C1730
Barrel : PhBz C5212
Spring : SUS304
- Plating(电镀)
Plunger: 2 micro-inch minimum Au over 80~120 micro-inch nickel
Barrel: 2 micro-inch minimum Au over 40~80 micro-inch nickel
- Electrical
Rated current: 2.0A Max.
Contact resistance: 100 mohm maximum at recommended travel(quiescence)
- Mechanical
Recommended travel :2.80 mm
Full travel :4.20 mm
Spring force : 100 g ± 20% at recommended travell
- Durability :
Mechanical life 100k cycles(minimum) at recommended travel
- RoHS and HF compliant product.

DRAW (设计)	钟志鹏	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P-02A1-0515
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2018.11.30	REV (版次)	D.0	TITLE (品名)	Test Probe
APPROVE (核准)		PLATE (镀层)	Seeing notes (见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.