

4


3

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS(修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
	INITIAL RELEASE(首次发行)	ECN-2201401024	2014.01.20

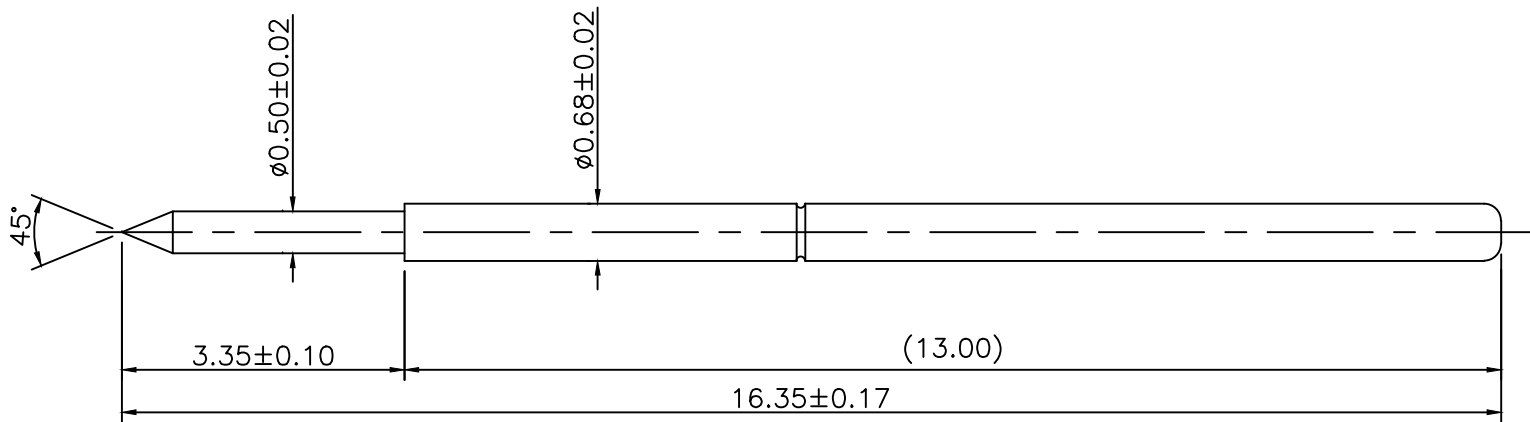

NOTE;

- Material
Plunger: SK4 Au Plated
Barrel: PhBz Au Plated
Spring: SWP Au Plated
- Electrical
Rated current : 1.5A Max.
Contact resistance: 100 mohm maximum at working stroke(quiescence)
- Mechanical
Full stroke: 3.35 mm
Spring Force :85g±20% at 2.25 mm working stroke
Durability: 100,000 cycles(minimum)
- Harmful material control please follow DOC. NO."DQ03050"
- Working temperature: -40°C~180°C(peak)

DRAW (设计)	linyushou	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P-0B-0512		
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes(见备注)		
AUDIT (审核)		COUNTER SIGN (会签)				DATE (日期)	2016.08.10	REV	A.0
APPROVE (核准)		PLATE (镀层)				TITLE (品名)	Test Probe(测试探针)		

THE UNMARKED TOLERANCE ARE AS BELOW :

(未标记的公差)			
LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

4

2

1