


REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE		

Please Approve this Drawing	
Date	
Signature	

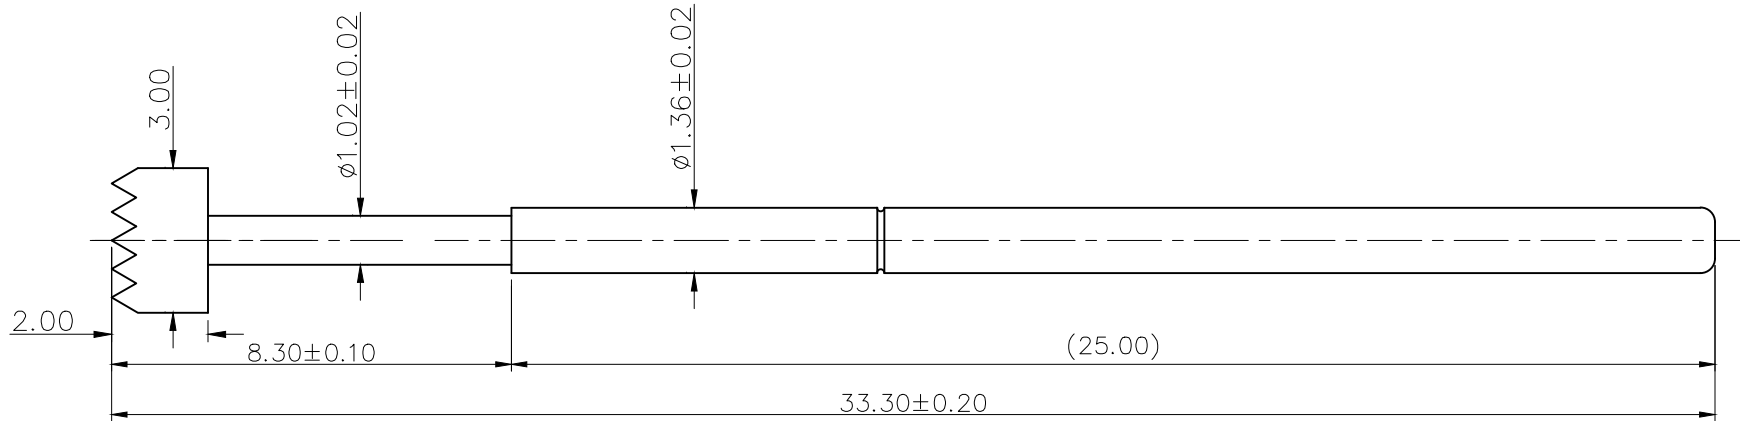

NOTE;

- Material  
Plunger: SK4 Au Plated  
Barrel: Brass Au Plated  
Spring: SUS Not Plated
- Electrical  
Rated current : 3A Max.  
Contact resistance: 50 mohm maximum at working stroke(quiescence)
- Mechanical  
full travel: 6.30mm  
Spring Force :170g±20%g at 4.20 mm working travel  
Spring Force :250g±20%g at 6.30 mm full trave(Ref)  
Durability: 100,000 cycles(minimum)
- RoHS and HF compliant product.

DRAW (设计)	linyushou	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P-25H6-1525
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes
AUDIT (审核)		DATE (日期)	2017.04.18	VER (版次)	D.0	TITLE (品名)	Test Probe
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)						C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司	
0~6.0	±0.05mm	0.	±2.0°		The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.		
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				