


| REVISIONS (修正) |                 |              |          |
|----------------|-----------------|--------------|----------|
| NO. (序号)       | DESCRIPTION(描述) | DCN NO.(变更号) | DATE(日期) |
| D.0            | NEW RELEASE     |              |          |

|                             |  |
|-----------------------------|--|
| Please Approve this Drawing |  |
| Date                        |  |
| Signature                   |  |

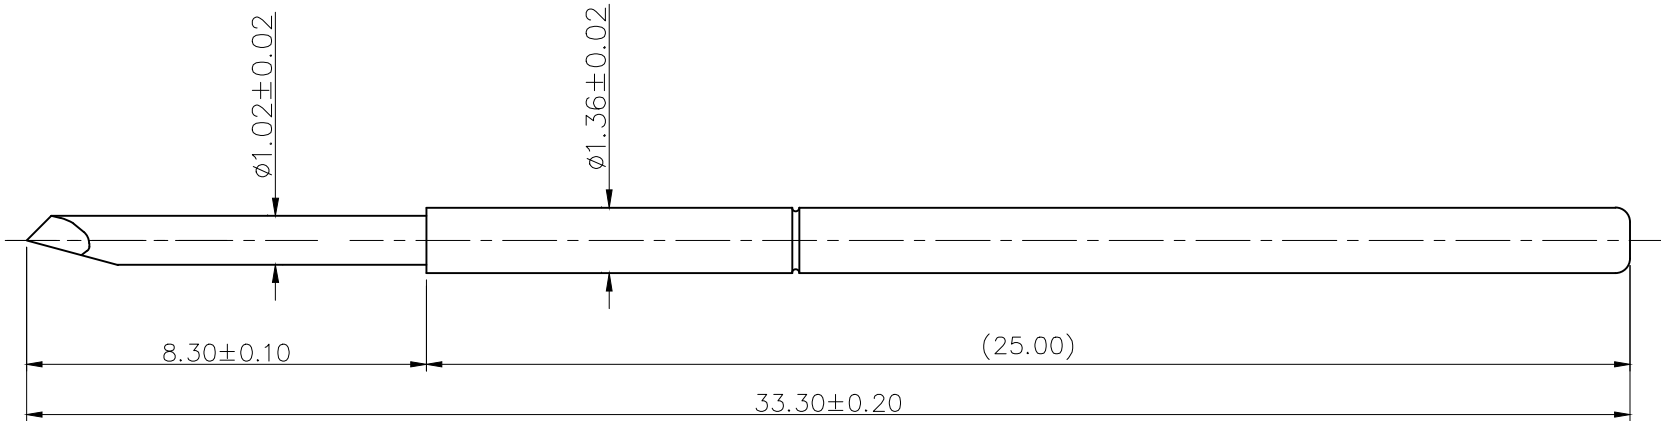

NOTE;

1.Material  
Plunger: SK4 Au Plated  
Barrel: Brass Au Plated  
Spring: SUS Not Plated

2.Electrical  
Rated current : 3A Max.  
Contact resistance: 50 mohm maximum at working stroke(quiescence)

3.Mechanical  
full travel: 6.30mm  
Spring Force :170g±20%g at 4.20 mm working travel  
Spring Force :250g±20%g at 6.30 mm full trave(Ref)  
Durability: 100,000 cycles(minimum)

4.RoHS and HF compliant product.

|                                                                                  |           |               |                   |                                                                                                                                                    |                                                                                       |                     |              |
|----------------------------------------------------------------------------------|-----------|---------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------|--------------|
| DRAW<br>(设计)                                                                     | linyushou | SCALE<br>(比例) | 10 : 1            | UNIT<br>(单位)                                                                                                                                       | mm                                                                                    | DRAWING NO.<br>(图号) | P-25T-1525   |
| COUNTER SIGN<br>(会签)                                                             |           | SHEET<br>(页数) | 1 of 1            | PROJECT<br>(视图)                                                                                                                                    |  | MATERIAL<br>(材质)    | Seeing notes |
| AUDIT<br>(审核)                                                                    |           | DATE<br>(日期)  | 2017.04.18        | VER<br>(版次)                                                                                                                                        | D.0                                                                                   | TITLE<br>(品名)       | Test Probe   |
| APPROVE<br>(核准)                                                                  |           | PLATE<br>(镀层) | Seeing notes(见备注) |                                                                                                                                                    |                                                                                       |                     |              |
| THE UNMARKED TOLERANCE ARE AS BELOW :<br>(未标记的公差)<br>LENGTH (尺寸)                 |           |               |                   | C.C.P. (DG) CONTACT PROBES CO.,LTD.<br>东莞中探探针有限公司                                                                                                  |                                                                                       |                     |              |
| 0~6.0 ±0.05mm 0. ±2.0°<br>>6~30 ±0.10mm 0.0 ±1.0°<br>>30~120 ±0.15mm 0.00 ±0.50° |           |               |                   | The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission. |                                                                                       |                     |              |