






Please Approve this Drawing

Date  
Signature

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201412027	2014.12.14
A.1	外壳电镀工艺又电泳变更为PVD, 增加耐磨性	ECN-2201504009	2015.04.08

NOTES:

- Materials:
  - .Housing: LCP UL94V-0, Black.
  - .Pin: brass
  - .Shell: SUS430
  - .Magnet: magnetic material
- Plating:
  - .Pin: 10 micro-inch minimum Au over 50~100 micro-inch nickel.
- Electrical:
  - .Rated current & voltage: DC12V, 1A.
  - .Contact resistance: 50 mohm maximum at working height(quiescence)
- Harmful material control please follow DOC. NO."DQ03050"

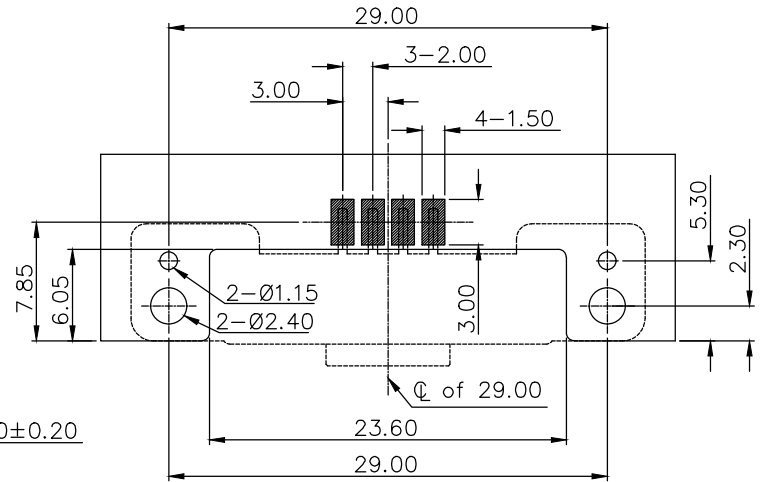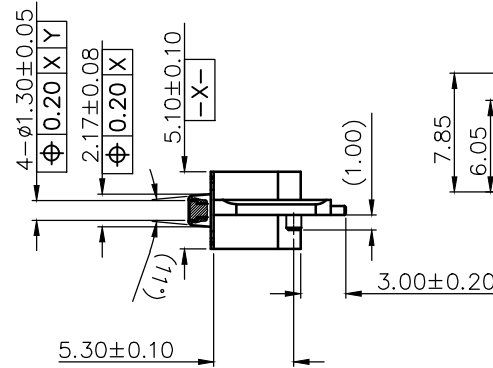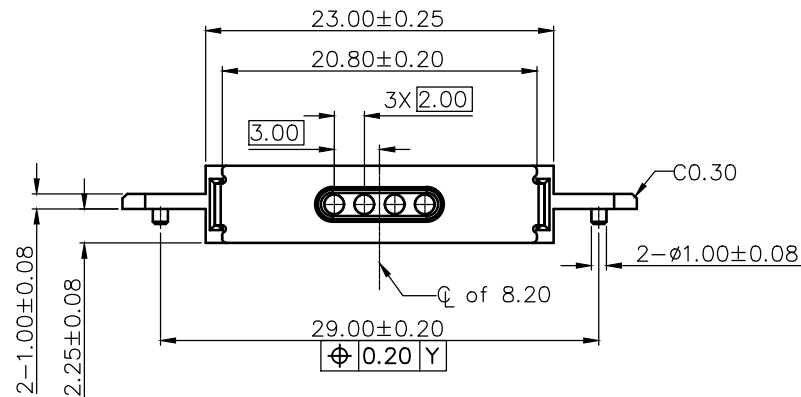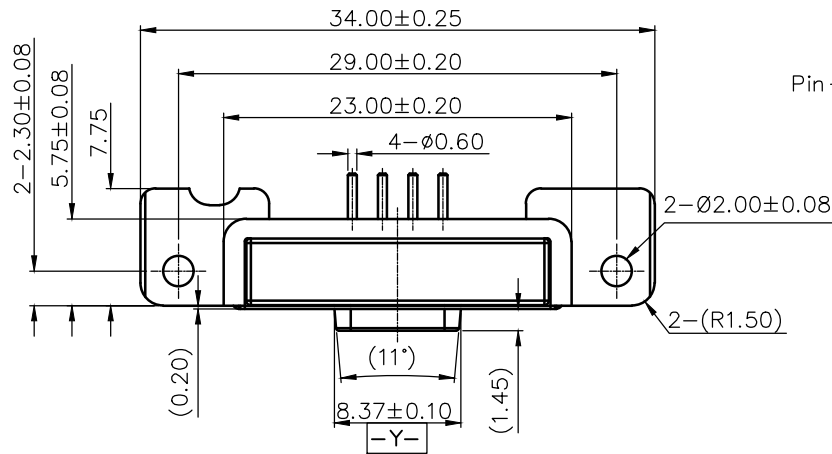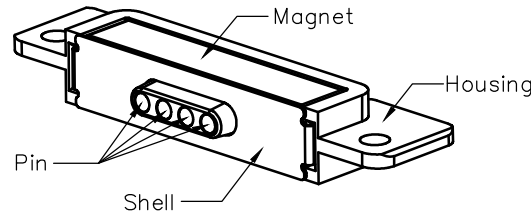

RECOMMEND PCB LAYOUT(TOP VIEW)  
Layout Tolerance: ± 0.05mm

DRAWN (设计)	TXS	SCALE (比例)	2 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P2508FL01-04R200HT
CHECKED (确认)		SHEET (页数)	1 of 1	PROJECT (视图)		TITLE (品名)	2.00pitch 4 pin Conn.
APPROVED (核准)		DATE (日期)	2015.04.08	VER. (版本)	A.1		

THE UNMARKED TOLERANCE ARE AS BELOW :  
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.  
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.