


REVISIONS(修正)			
NO.(序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
	INITIAL RELEASE(首次发行)		
▲			

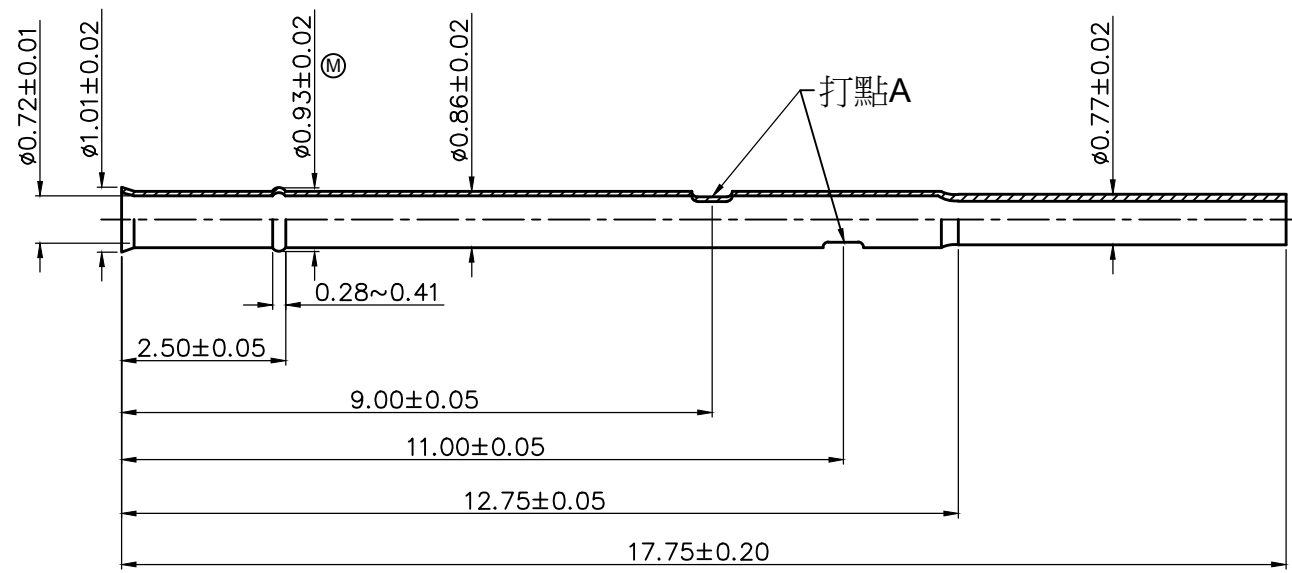

NOTE: (技术规范)

- MATERIALS: (材质)
 - .Receptacle(外管): C5440(磷铜5440)
- Plating(电镀):
 - .Receptacle(外管): PhBz Ni/Au
 - .2 micro-inch minimum Au over 80~120 micro-inch Ni (镀镍 80~120 micro-inch后最少镀金 2 micro-inch)
- The insert force reference vaule is 0.4~1.2kgf with $\phi 0.68$ gauge pin (采用 $\phi 0.68$ 圆规测试插入力参考值为0.4~1.2kgf)
- Harmful material control please follow DOC. NO."DQ03050" (有害物质管控请遵循文件NO."DQ03050")
- The original Receptacle P/N (使用原外管料号): PR-0V-C05
- Ⓜ Mark is major dimension(标记Ⓜ符号尺寸为重点尺寸)

DRAWN (设计)	linyushou	SCALE (比例)	1 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	PR-0V-C05
CHECKED (确认)		SHEET (页数)	1 of 1	PROJECT (视图)		TITLE (品名)	Receptacel
APPROVED (核准)		DATE (日期)	2015.01.14	VER. (版本)	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差)				C.C.P. (DG) CONTACT PROBES CO.,LTD.			
LENGTH (尺寸)		ANGLE (角度)		东莞中探探针有限公司			
0~6.0	±0.05mm	0.	±2.0°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				