

4

3


▽

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-2201510020	2015.10.09

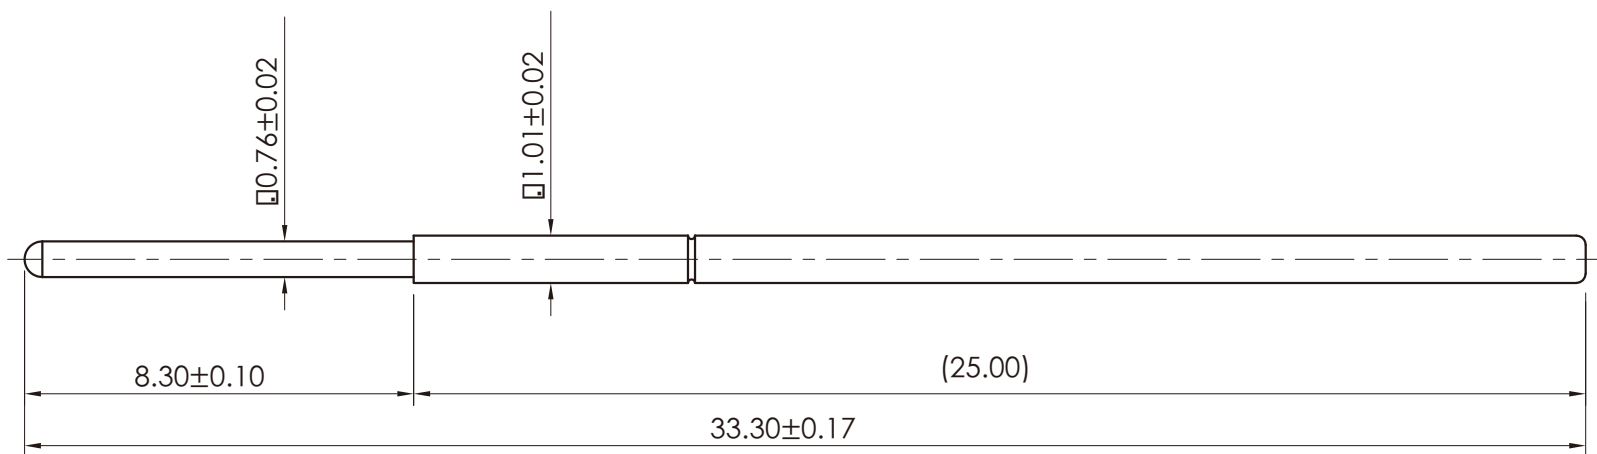

NOTE;

1.Material

Plunger: BeCu 10u" Min. Au Plated
 Barrel: PhBz 2u" Min. Au Plated
 Spring: SUS304 Not Au Plated

2.Electrical

Rated current : 3A Max.
 Contact resistance: 100 mohm maximum at working stroke(quiescence)

3.Mechanical

Full stroke: 6.30 mm
 Spring Force :100g±20% at 4.20 mm working stroke
 Durability: 100,000 cycles(minimum)

4.Harmful material control please follow DOC. NO. "DQ03050"

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P-111D-1515
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2015.10.09	VER.	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :						C.C.P. (DG) CONTACT PROBES CO.,LTD.	
LENGTH		ANGLE		东莞中探探针有限公司			
0~6.0	±0.05mm	0.	±2.0°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				

4

3

▽

2

1