
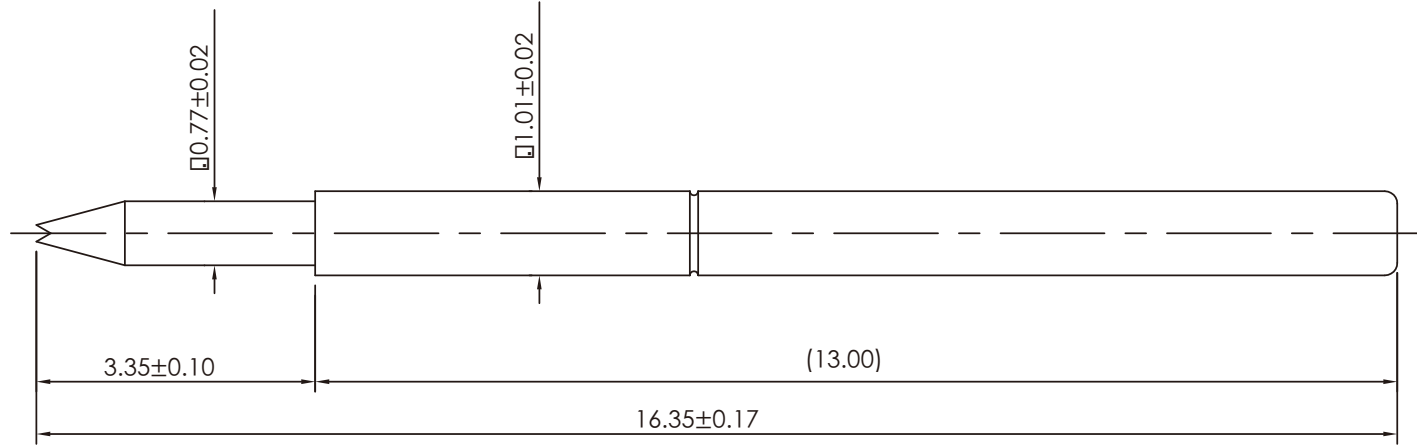


Please Approve this Drawing	
Date	
Signature	

REVISIONS(修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	INITIAL RELEASE(首次发行)	ECN-2201708018	2017.08.22



NOTE:

- Material  
Plunger: SK4 Au Plated  
Barrel: Brass Au Plated  
Spring: SUS Not Au Plated
- Electrical  
Rated current : 3A Max.  
Contact resistance: 100 mohm maximum at working stroke(quiescence)
- Mechanical  
Full stroke: 2.54 mm  
Spring Force :  $90g \pm 20\%$  at 1.70 mm working stroke  
Durability: 100,000 cycles(minimum)
- RoHS&HF compliant product.

DRAW (设计)	linyushou	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P-1F-0513
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2017.08.22	VER (版本)	A.0	TITLE (品名)	Test Probe( 测试探针)
APPROVE (核准)		PLATE (镀层)		Seeing notes (见备注)			

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH (尺寸)	ANGLE (角度)
0-6.0	$\pm 0.05\text{mm}$ 0. $\pm 2.0^\circ$
>6-30	$\pm 0.10\text{mm}$ 0.0 $\pm 1.0^\circ$
>30-120	$\pm 0.15\text{mm}$ 0.00 $\pm 0.50^\circ$

**C.C.P. (DG) CONTACT PROBES CO.,LTD.**  
**东莞中探探针有限公司**

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.