


| | |
|-----------------------------|--|
| Please Approve this Drawing | |
| Date | |
| Signature | |

| REVISIONS(修正) | | | |
|---------------|-----------------------|-----------------|------------|
| NO. (序号) | DESCRIPTION(描述) | ECN NO.(变更号) | DATE(日期) |
| | INITIAL RELEASE(首次发行) | ECN-20090423001 | 2009.04.23 |
| | | | |

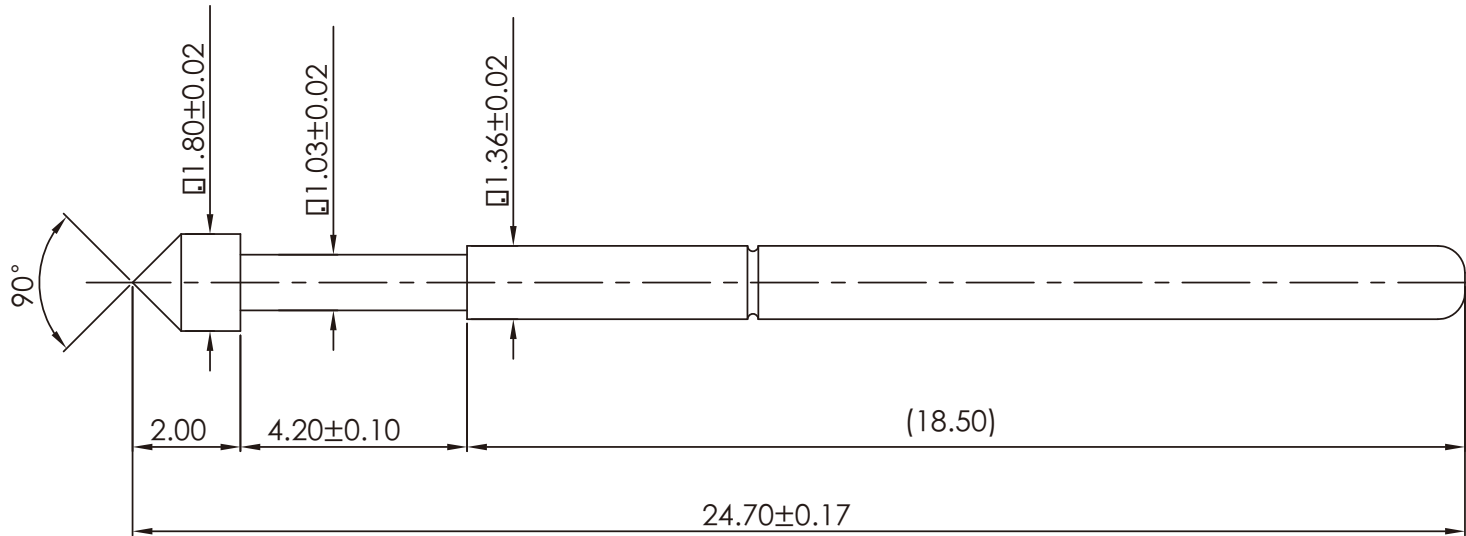

NOTE:

- Material
Plunger: BeCu Au Plated
Barrel: Brass Au Plated
Spring: SUS Not Au Plated
- Electrical
Rated current : 3A Max.
Contact resistance: 50 mohm maximum at working stroke(quiescence)
- Mechanical
Full stroke: 4.20 mm
Spring Force : 115g±20% at 2.80 mm working stroke
Durability: 100,000 cycles(minimum)
- Harmful material control please follow DOC. NO."DQ03050"
- Working temperature: -40° C~180° C(peak)

| | | | | | | | | | |
|--------------|-----------|-------------------|--------|--------------------|----|------------------|--------------------|-----|-----|
| DRAW (设计) | linyushou | SCALE (比例) | 10 : 1 | UNIT (单位) | mm | DRAWING NO. (图号) | P-21E2-0515 | | |
| CHECK (校对) | | SHEET (页数) | 1 of 1 | PROJECT (视图) | | MATERIAL (材质) | Seeing notes (见备注) | | |
| AUDIT (审核) | | COUNTER SIGN (会签) | | | | DATE (日期) | 2016.08.10 | REV | A.0 |
| APPROVE (核准) | | PLATE (镀层) | | Seeing notes (见备注) | | TITLE (品名) | Test Probe(测试探针) | | |

THE UNMARKED TOLERANCE ARE AS BELOW :

| LENGTH (尺寸) | ANGLE (角度) |
|-------------|---------------------|
| 0~6.0 | ±0.05mm 0. ±2.0° |
| >6~30 | ±0.10mm 0.0 ±1.0° |
| >30~120 | ±0.15mm 0.00 ±0.50° |

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.