

4

3


↓

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-2201407065	2014.07.24

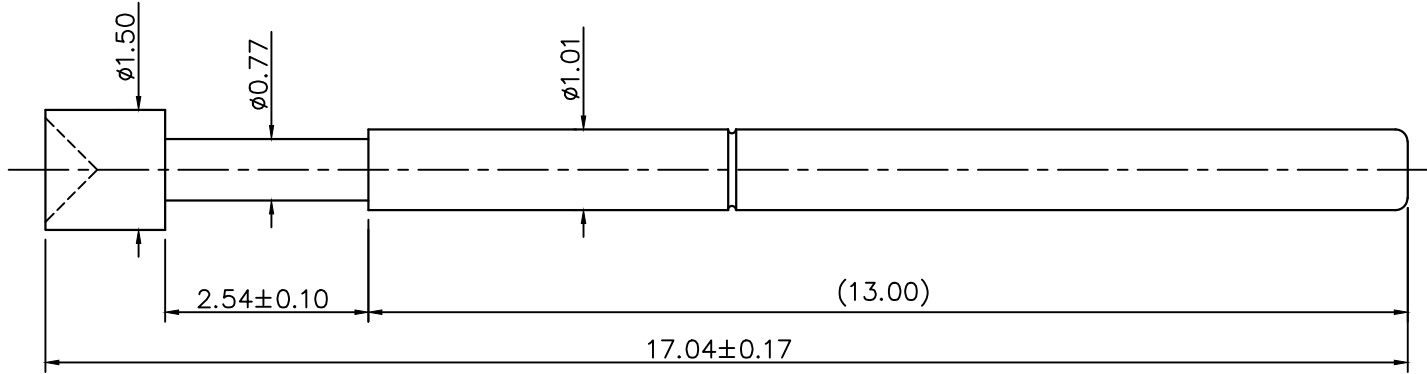

NOTE;

- Material
 Plunger: BeCu Au plated
 Barrel: Brass Au plated
 Spring: SUS304 Not Plated
- Electrical
 Rated current : 3A Max.
 Contact resistance: 100 mohm maximum at 1.70 mm working stroke(quiescence)
- Mechanical
 Full stroke: 2.54 mm
 Spring Force : $90g \pm 20\%$ at 1.70 mm working stroke
 Durability: 100,000 cycles(minimum)
- Harmful material control please follow DOC. NO."DQ03050"

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P-1A1-0513
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2014.07.24	VER.	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO.,LTD.			
LENGTH		ANGLE		东莞中探探针有限公司			
0~6.0	$\pm 0.05\text{mm}$	0.	$\pm 2.0^\circ$	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	$\pm 0.10\text{mm}$	0.0	$\pm 1.0^\circ$				
>30~120	$\pm 0.15\text{mm}$	0.00	$\pm 0.50^\circ$				

4

3

↑

2

1